




**FORT  
STARK**

**KDL 220+**  
— profi —

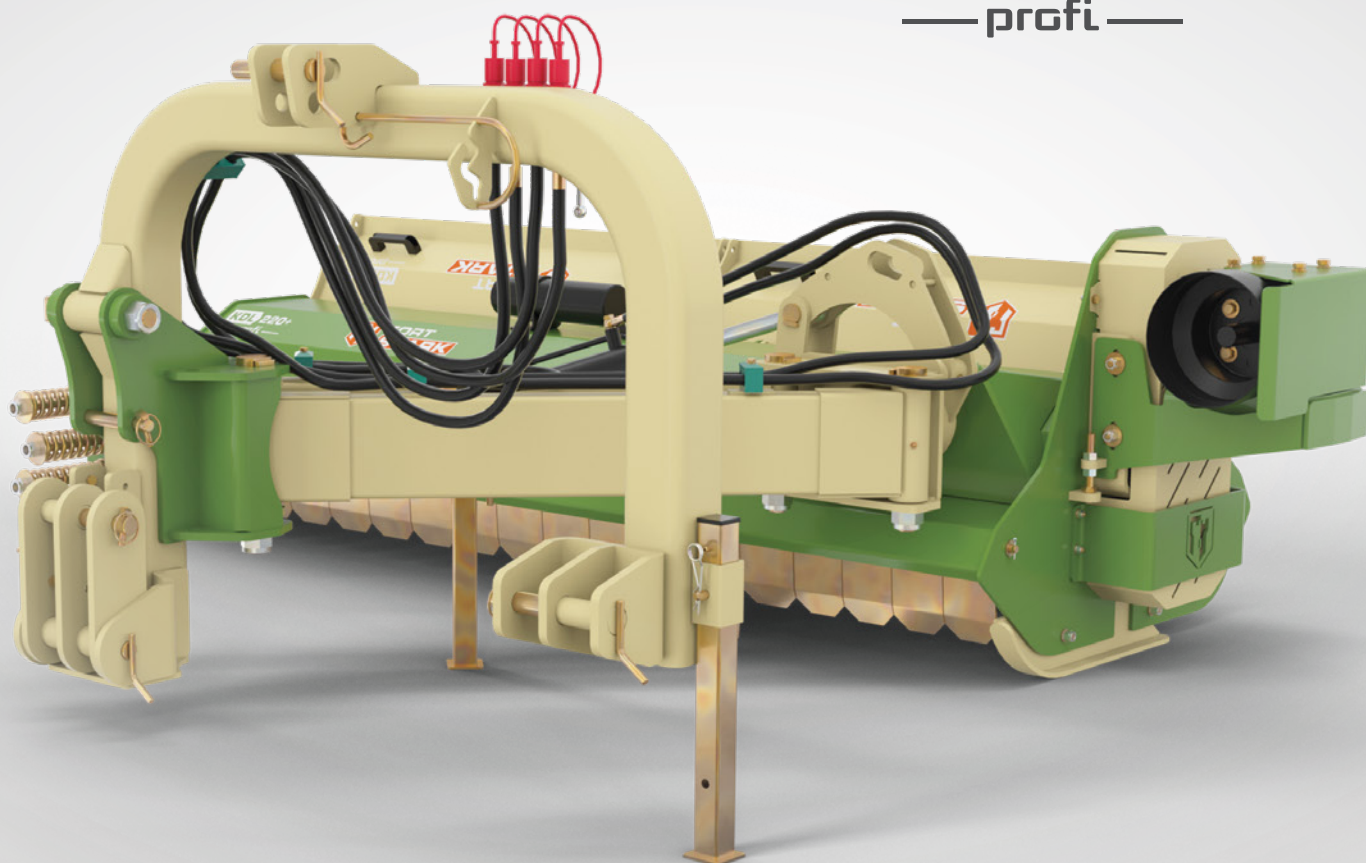


**KDL 160+**  
— profi —

**KDL 180+**  
— profi —


**KDL 200+**  
— profi —

**KDL 220+**  
— profi —

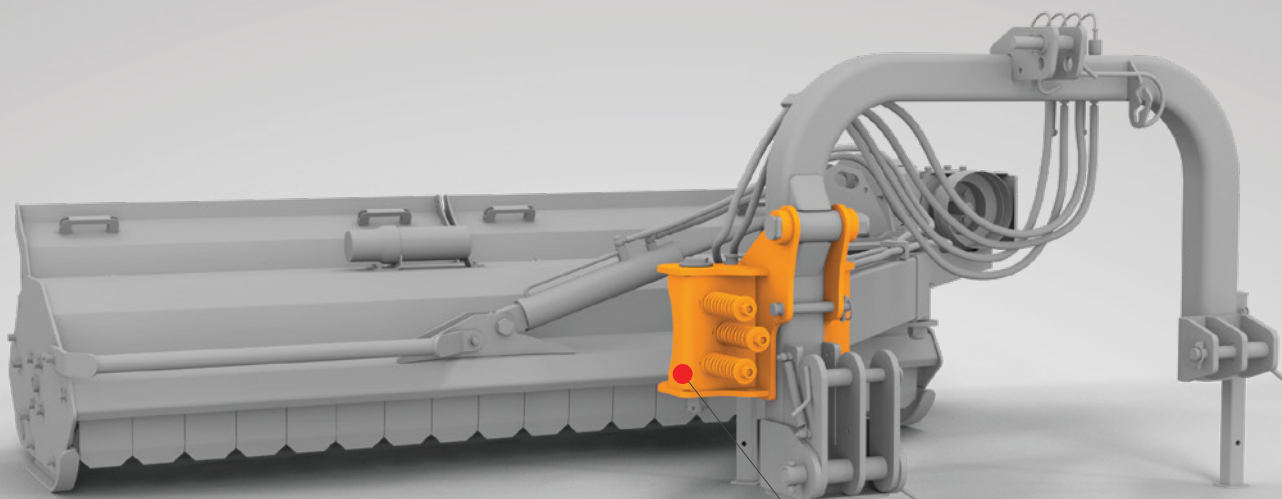

### SPRING-LOADED ANTI-COLLISION SECURITY SYSTEM

The machine frame is protected by a non-stop spring-loaded safety system should it hit an obstacle. After clearing the obstacle, the machine automatically returns to working position.

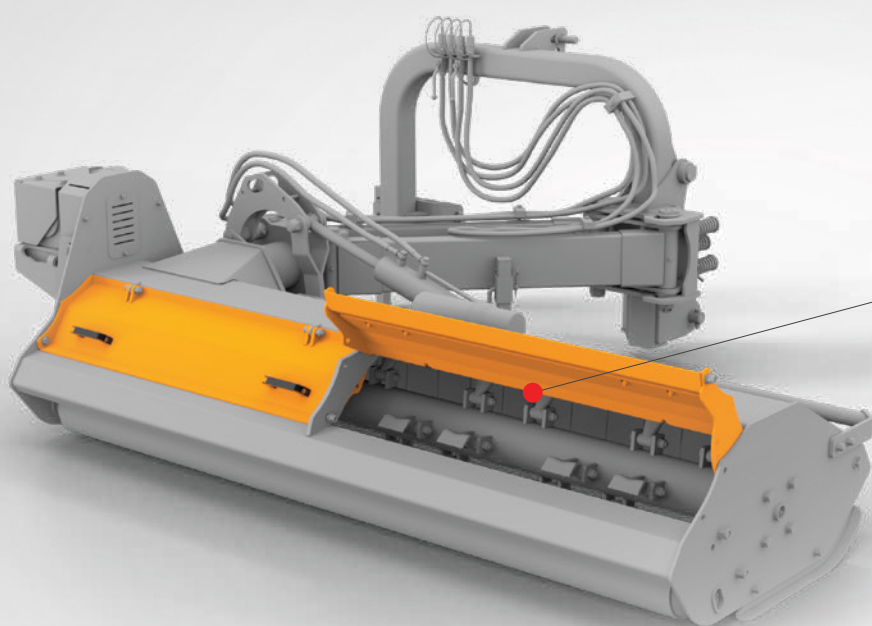








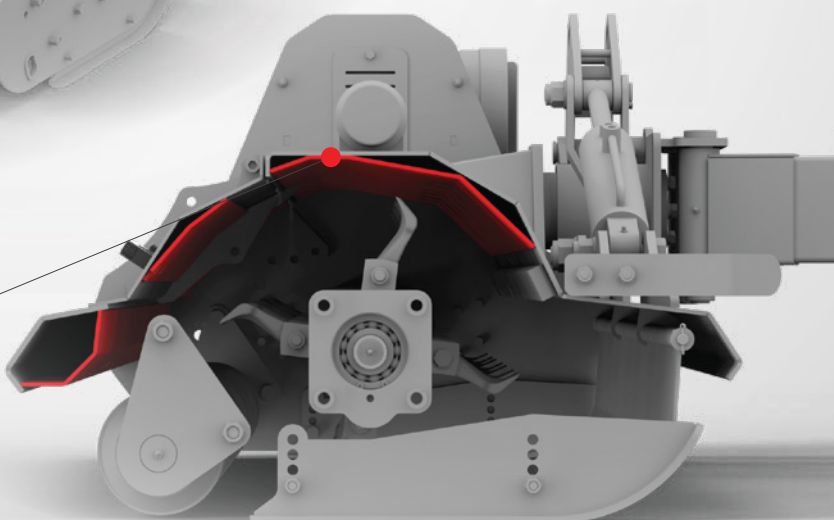


### A ROBUST AND MULTIPURPOSE HOOD

The rear hood is adjustable. Adjust it to the minimum for shredding slightly dense vegetation or maximum product recycling. Adjust it to the maximum when shredding dense vegetation or if you want to work faster, while limiting the power input.

### DOUBLE METAL FRAME

The cutting chamber on features a double-skinned construction (5 + 4 mm) The toothed counter blades allow the machine to mulch even the more voluminous residues and thicker branches into fine pieces. The body is reinforced with the addition of a sheet metal internal housing for extra strength.



Flail mowers									
<b>KDL 160+ Profi</b>	<b>1,60</b>	<b>70(52)</b>	<b>II / III</b>	<b>540</b>	<b>127</b>	<b>22</b>	Y2036   Z379 K2633   X1600	W1140°   E90°   F45°	<b>684</b>
<b>KDL 180+ Profi</b>	<b>1,80</b>	<b>80(60)</b>				<b>26</b>	Y2036   Z379 K2833   X1800	W1340°   E90°   F45°	<b>723</b>
<b>KDL 200+ Profi</b>	<b>2,00</b>	<b>90(67)</b>				<b>28</b>	Y2036   Z379 K3033   X2000	W1540°   E90°   F45°	<b>757</b>
<b>KDL 220+ Profi</b>	<b>2,20</b>	<b>100(75)</b>				<b>32</b>	Y2036   Z379 K3233   X2200	W1740°   E90°   F45°	<b>785</b>