

SHOCK PROTECTION SYSTEM

The head's floating system allows it to follow the contours of the surfaces being worked on, preventing any damage to the structure. The connecting rod on one of the lower hitch points is an additional safety measure in the event of collision with obstacles.


THE WELDED COUNTER TRIPLE BLADE

CLEAN, WELL-KEPT GRASSY AREAS

On the KDS Profi series the roller is positioned as close as possible to the rotor. In this way, all the shredded material is ejected over the roller for quicker decomposition than if it would be compacted. The visual result will speak for itself. Main benefits of this design:

- excellent ground contouring,
- automatic cleaning by knives.

Designed and engineered to deliver unbeatable efficiency for a fine mulch even when working at higher speeds. The welded counter trible blade, found on all models, ensures material is cut cleanly.

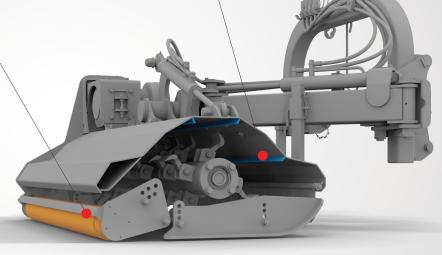

TRANSMISSION BELT

The 4 drive belts can be tensioned simply and easily by means of a practical external screw system. All implements are fitted with toothed belts that, unlike plain belts, prove more effective and offer greater performance.

Flail mowers		min HP (kW)	☐ Cat	RPM		\$	Y Z K		Kg
KDS 125 Profi	1,25	26(19)	II	540	108	20	Y1493 Z512 K1758 X1250	W700° E90° F55°	382
KDS 145 Profi	1,45	35(26)				24	Y1493 Z512 K1958 X1450	W900° E90° F55°	401