








TRANSMISSION BELT

The 3 drive belts can be tensioned simply and easily by means of a practical external screw system. All implements are fitted with toothed belts that, unlike plain belts, prove more effective and offer greater performance.

DOUBLE 3-POINT LINKAGE MOUNTING

The KMH-FK Profi can be easily attached to the tractor front or rear. As the KMH-F Profi models, the KMH-F Profi seria range is also equipped with a 350mm hydraulic offset as standard. The shredder slides on two tubes of 40mm diameter, including Teflon bushes and greaser for more reliability.

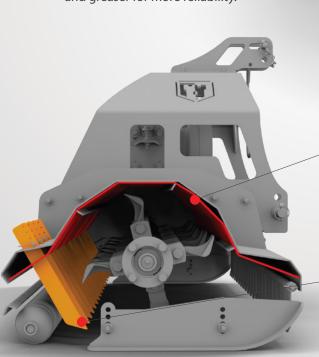

DOUBLE METAL FRAME

The cutting chamber on features a double-skinned construction (4 + 4 mm) The toothed counter blades allow the machine to mulch even the more voluminous residues and thicker branches into fine pieces. The body is reinforced with the addition of a sheet metal internal housing for extra strength.

COLLECTING RAKE KIT

For finer mulching of the residue, KMH 155FK Profi and KMH 175FK Profi equipped with adjustable collecting rakes. Residue is retained under the bonnet, allowing it to be broken down further to a given size.

Flail mowers		min HP (kW)	Cat	RPM		\$	A B	Kg
KMH 155FK Profi	1,55	26(19)	1/11	540	108	24	A870 B1029	435
KMH 175FK Profi	1,75	36(27)					A870 B1227	461