



**FORT
STARK**

(RS 135
— profi —




(RS 95
— profi —

(RS 105
— profi —

(RS 115
— profi —

(RS 125
— profi —

(RS 135
— profi —

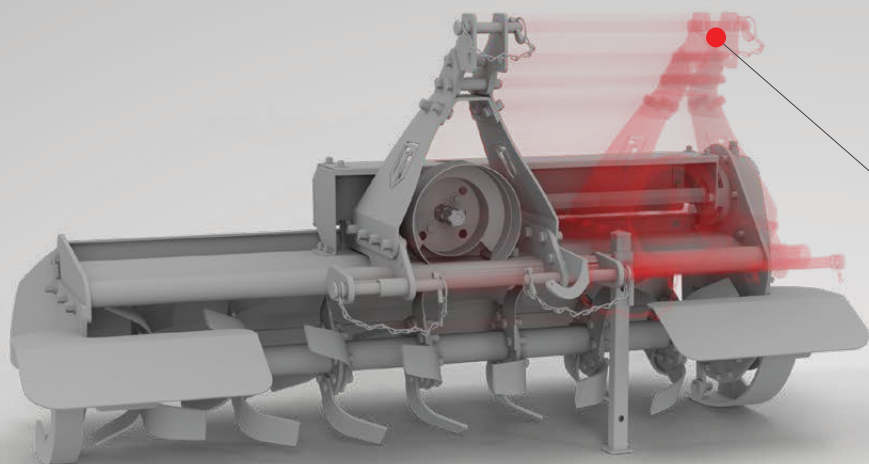


MECHANICAL OFFSET

All RS Profi the machine in this range can work both in central position ori and adjustable offset to the right side. The special shaft and 3 point hitch mounted on skid make this possible.





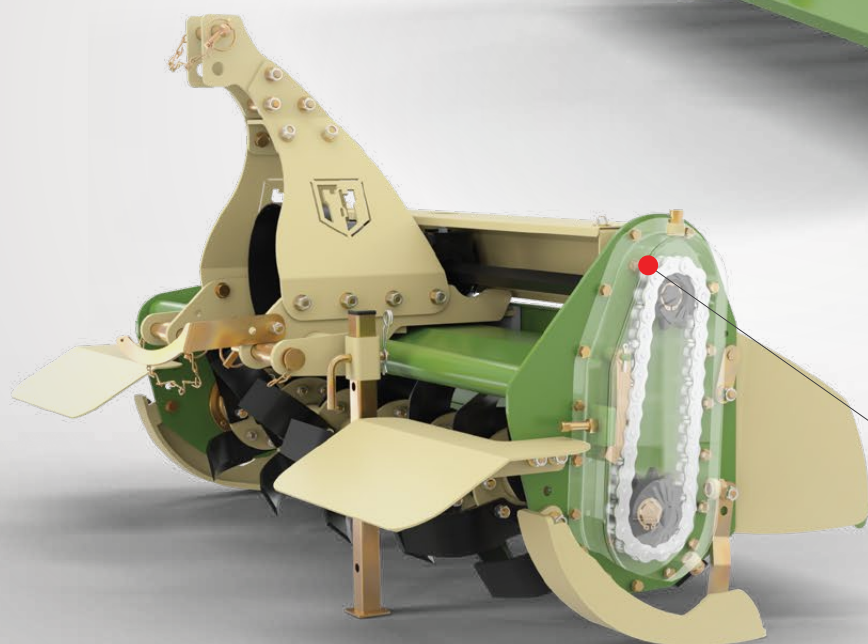



LEVELLING BONNET

Levelling bonnet The rear levelling bonnet, with its progressive sloping profile and greater width at the leading edge, ensures consistently optimal levelling.



CHAIN SIDE DRIVE

All RS Profi models have a single speed reduction box and a side oil bath chain drive with tensioning system.

Rotary tiller								
RS 95 Profi	0,95	12-20	I	540	E 60 / F 410	190	10 10	132
RS 105 Profi	1,05	16-22					12 12	147
RS 115 Profi	1,15	22-25					14 14	152
RS 125 Profi	1,25	25-30						162
RS 135 Profi	1,35	30-35						167